


# FAGLE

## LED SURFACE PROFILE

Design Riccardo Piccin

Apparecchio LED IP65 con corpo stretto e cilindrico orientabile, diametro 16mm, realizzato in policarbonato estruso opale, resistente ai raggi UV. Può essere installato su elementi scolapiatti, pareti e soffitti utilizzando i ganci in policarbonato trasparente forniti di serie. Ideale anche per giardini. FAGLE permette di creare giochi di luce, di percorsi, altamente scenografici e dare all'ambiente quel tocco esclusivo di creatività che fa la differenza. Cablaggio di alimentazione in NEOPRENE H05RN-F 2x0,50mmq, lunghezza 3000mm. Configurazioni personalizzate (lunghezze del profilo, colore luce RGB, cablaggio, ecc.) sono disponibili su richiesta.

*IP65 rated adjustable slim cylindrical, 16mm diameter, LED light fitting in uv-ray resistant opal extruded polycarbonate. It can be installed under plate rake cabinet, wall and ceiling mounted using the transparent hangers, supplied as standard. Suitable also for outdoor applications (garden and terrace design). FAGLE allows the creation of light effects, of highly impressive paths, giving to surrounding space the exclusive touch of creativity that makes the difference. Power supply cable made in NEOPRENE H05RN-F 2x0.50mmq cable 3000mm length. Personalized configurations (length of profile, positions of the sensors, length of cable, etc..) are available on request.*



Ø 16 mm



IP65

#### FAGLE 10 collection


MODEL	FAGLE 10 1000	FAGLE 10 450	FAGLE 10 600	FAGLE 10 900	FAGLE 10 1200
Dimension (L)	1000 mm	410 mm	560 mm	860 mm	1160 mm
Finish	Polycarbonato opale Opal polycarbonate	Polycarbonato opale Opal polycarbonate	Polycarbonato opale Opal polycarbonate	Polycarbonato opale Opal polycarbonate	Polycarbonato opale Opal polycarbonate
Max wattage	10W / meter	3,6W	5,04W	7,92W	10,8W
Lumen	720-840 lm	270-315 lm	378-441 lm	594-693 lm	810-945 lm
CRI	80	80	80	80	80
n. leds	120 leds / meter	45 leds	63 leds	99 leds	135 leds
Voltage	12VDC	12VDC	12VDC	12VDC	12VDC
Optic	120°	120°	120°	120°	120°
Cut out LxW	-	-	-	-	-
Installation	surface	surface	surface	surface	surface
<b>Color appearance</b>					
WW—Warm white	140.19.031	140.11.031	140.12.031	140.13.031	140.14.031
NW—Natural white	140.19.032	140.11.032	140.12.032	140.13.032	140.14.032
CW—Cool white	140.19.033	140.11.033	140.12.033	140.13.033	140.14.033

#### FAGLE 20 collection


MODEL	FAGLE 20 1000	FAGLE 20 450	FAGLE 20 600	FAGLE 20 900	FAGLE 20 1200
Dimension (L)	1000 mm	410 mm	560 mm	860 mm	1160 mm
Finish	Polycarbonato opale Opal polycarbonate	Polycarbonato opale Opal polycarbonate	Polycarbonato opale Opal polycarbonate	Polycarbonato opale Opal polycarbonate	Polycarbonato opale Opal polycarbonate
Max wattage	19,6W / meter	7,35W	10,29W	16,20W	22,05W
Lumen	800-1140 lm	297-428 lm	416-599 lm	653-941 lm	891-1282 lm
CRI	80	80	80	80	80
n. leds	120 leds / meter	45 leds	63 leds	99 leds	135 leds
Voltage	12VDC	12VDC	12VDC	12VDC	12VDC
Optic	120°	120°	120°	120°	120°
Cut out LxW	-	-	-	-	-
Installation	surface	surface	surface	surface	surface
<b>Color appearance</b>					
WW—Warm white	140.39.031	140.31.031	140.32.031	140.33.031	140.34.031
NW—Natural white	140.39.032	140.31.032	140.32.032	140.33.032	140.34.032
CW—Cool white	140.39.033	140.31.033	140.32.033	140.33.033	140.34.033


#### FAGLE 7 RGB collection

MODEL	FAGLE 7,2 1000
Dimension (L)	1000 mm
Finish	Polycarbonato opale Opal polycarbonate
Max wattage	7,2W / meter
Lumen	159 lm
CRI	-
n. leds	30 leds / meter
Voltage	12VDC
Optic	120°
Cut out LxW	-
Installation	surface
<b>Color appearance</b>	
RGB	141.09.004

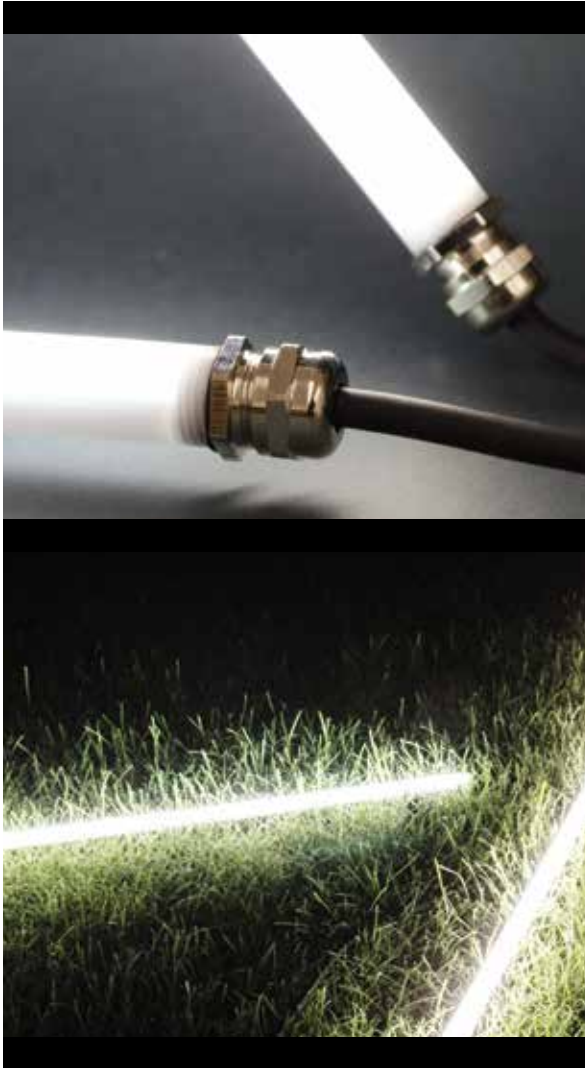


esempio di installazione outdoor  
*outdoor set-up example*

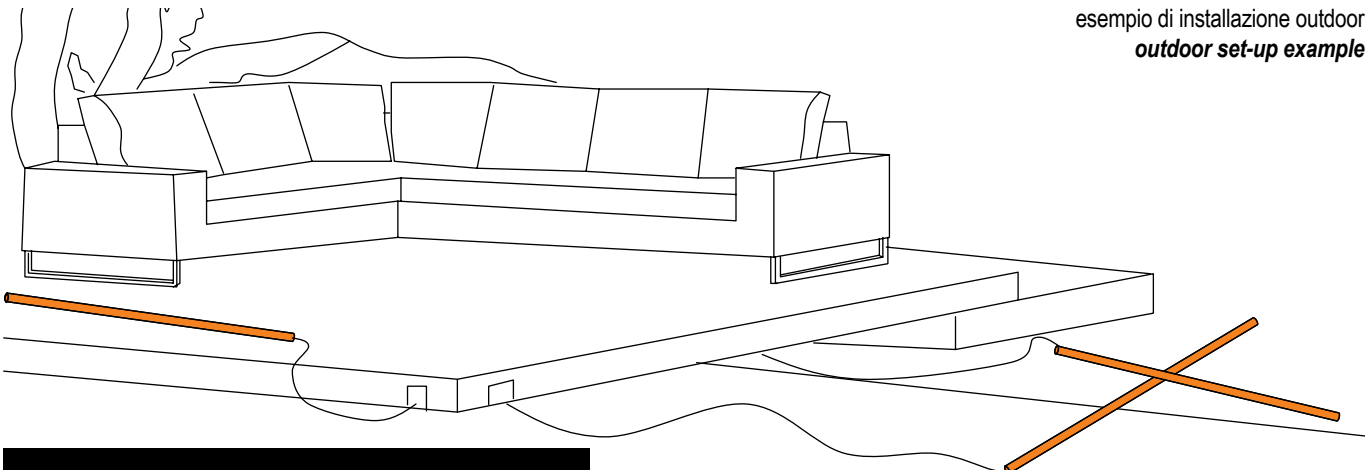

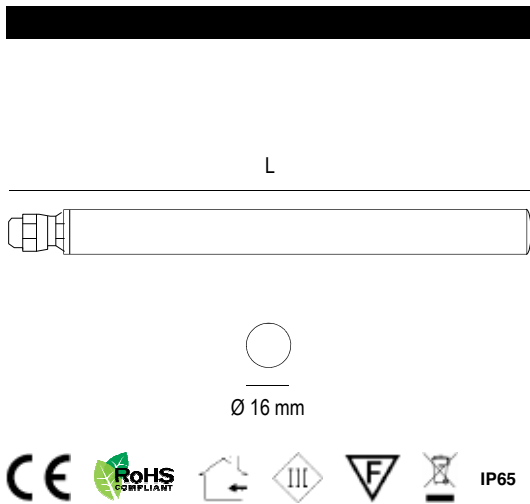


**FAGLE 10 TLS collection (with touch led switch)**

MODEL	FAGLE 10 TLS 1000	FAGLE 10 TLS 450	FAGLE 10 TLS 600	FAGLE 10 TLS 900	FAGLE 10 TLS 1200
Dimension (L)	1000 mm	410 mm	560 mm	860 mm	1160 mm
Finish	Policarbonato opale Opal polycarbonate	Policarbonato opale Opal polycarbonate	Policarbonato opale Opal polycarbonate	Policarbonato opale Opal polycarbonate	Policarbonato opale Opal polycarbonate
Max wattage	10W / meter	3,12W	4,56W	7,50W	10,40W
Lumen	720-840 lm	234-273 lm	342-399 lm	558-651 lm	774-903 lm
CRI	80	80	80	80	80
n. leds	120 leds / meter	39 leds	57 leds	93 leds	129 leds
Voltage	12VDC	12VDC	12VDC	12VDC	12VDC
Optic	120°	120°	120°	120°	120°
Cut out LxW	-	-	-	-	-
Installation	surface	surface	surface	surface	surface
<b>Color appearance</b>					
WW—Warm white	141.19.001	141.11.001	141.12.001	141.13.001	141.14.001
NW—Natural white	141.19.002	141.11.002	141.12.002	141.13.002	141.14.002
CW—Cool white	141.19.003	141.11.003	141.12.003	141.13.003	141.14.003

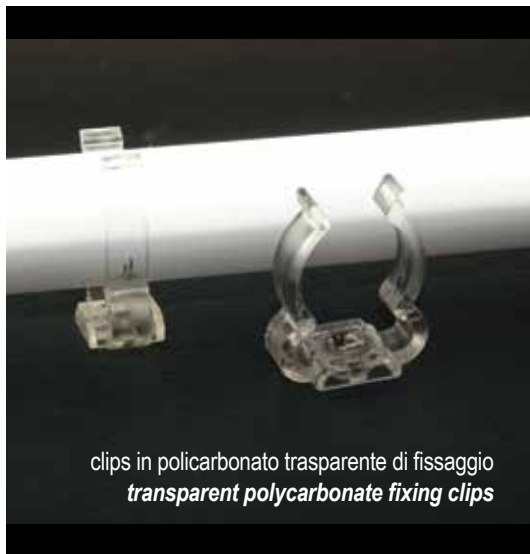

**FAGLE 20 TLS collection (with touch led switch)**

MODEL	FAGLE 20 TLS 1000	FAGLE 20 TLS 450	FAGLE 20 TLS 600	FAGLE 20 TLS 900	FAGLE 20 TLS 1200
Dimension (L)	1000 mm	410 mm	560 mm	860 mm	1160 mm
Finish	Policarbonato opale Opal polycarbonate	Policarbonato opale Opal polycarbonate	Policarbonato opale Opal polycarbonate	Policarbonato opale Opal polycarbonate	Policarbonato opale Opal polycarbonate
Max wattage	19,6W / meter	6,40W	9,32W	15,20W	21,10W
Lumen	792-1140 lm	257-370,5 lm	376,20-541,50 lm	613-883 lm	851-1225 lm
CRI	80	80	80	80	80
n. leds	120 leds / meter	39 leds	57 leds	93 leds	129 leds
Voltage	12VDC	12VDC	12VDC	12VDC	12VDC
Optic	120°	120°	120°	120°	120°
Cut out LxW	-	-	-	-	-
Installation	surface	surface	surface	surface	surface
<b>Color appearance</b>					
WW—Warm white	141.39.001	141.31.001	141.32.001	141.33.001	141.34.001
NW—Natural white	141.39.002	141.31.002	141.32.002	141.33.002	141.34.002
CW—Cool white	141.39.003	141.31.003	141.32.003	141.33.003	141.34.003

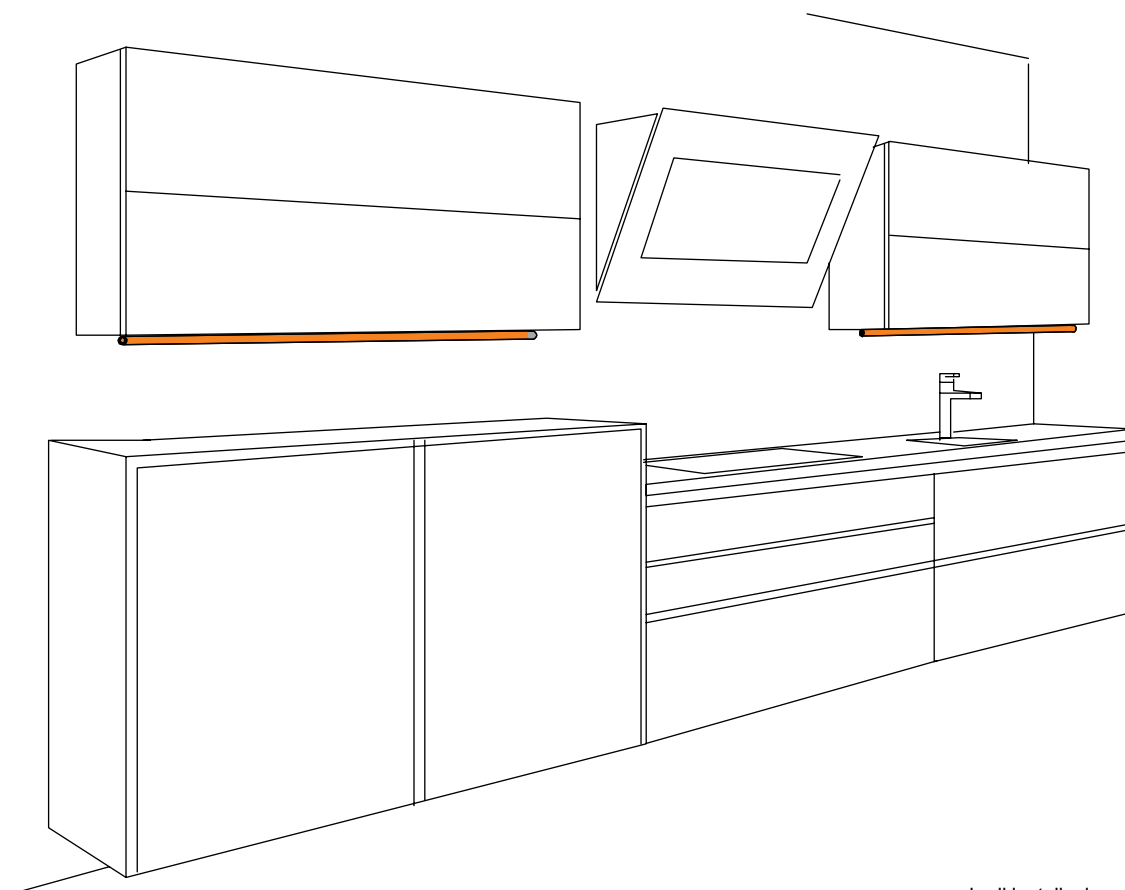

esempio di installazione su cucina  
**kitchen set-up example**