

Cucina
soggiorno
camera
bagno
negozi

*Kitchen, Living room, bedroom,
bathroom, shops*



ZEMIS



Design Ufficio Tecnico ZEMIS

PROFILO
MONTAGGIO
SPORGENTE
*Led surface
profiles*

LAVRI

Profilo LED illuminante studiato per l'illuminazione radiale dei ripiani in vetro. È realizzato da un estruso plastico trasparente con una parte rigida di contenimento della sorgente luminosa ed una morbida che consente l'applicazione a pressione su ripiani di spessore 8mm. Applicato su ripiani in vetro satinato genera un effetto illuminante diffuso su tutta la superficie. Applicato su ripiani in vetro trasparente illumina il bordo anteriore. Vetro non incluso. È possibile ordinare la lunghezza del profilo desiderata massimo 400 cm.

LED Light profile designed for the radial lighting of glass shelves. It is made of an extruded transparent pvc plastic double section; a rigid section that contains the light sources and a soft section that allows for pressure application on 8 mm thick shelves. Applied to frosted glass shelves, it generates a light effect that is diffused across the entire surface. Applied on transparent glass shelves. Shelves not included. You can order the desired length profile to a maximum of 400 cm.

modelli / models

caratteristiche / specifications

accessori / accessories


LAVRI 5

4,8W/m 12VDC 60leds/m
WW- 3000K - 360 lumen/m - CRI 80
NW - 4000K - 420 lumen/m - CRI 80
CW - 6000K a richiesta / on demand




LAVRI 10


9,6W/m 12VDC 120leds/m
WW- 3000K - 720 lumen/m - CRI 80
NW - 4000K - 840 lumen/m - CRI 80
CW - 6000K a richiesta / on demand



marcature / marks



dimensioni / dimensions

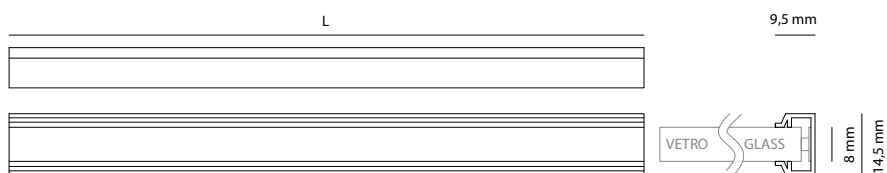

ZEMIS



LAVRI
PROFILO
MONTAGGIO SPORGENTE
Led surface profiles

finitura / finishes

diffusore / diffuser

fissaggio / fixing system

sorgente luminosa / light sources

alimentazione / power supply

dimensioni / dimensions

cablaggio / wiring

connettori / connectors

certificazione fotobiologica
photobiological risk

resa cromatica / CRI

allestimenti speciali
application type

PVC coestruso trasparente / Transparent coextruded PVC

Montaggio su ripiano in vetro spessore 8 mm ad incastro
Snap-in assembly on glass shelves 8 mm thickness

SMD LEDS 3528 (LAVRI 5) – SMD LEDS 2835 (LAVRI 10)

12VDC (LAVRI 5 / LAVRI 10)
Alimentatore elettronico led da ordinare separatamente
Power supply unit to be ordered separately

Su misura da 200mm a 4000mm / *Custom made from 200mm to 4000mm length*

Nella configurazione custom ogni apparecchio viene fornito con cablaggio
L.100mm e prolunga L.3000mm / *Custom made luminaire is supplied with wiring
L.100mm length and extension lead L.3000mm length*

MV+MX system 12VDC / LV system 24VDC

Nessun rischio classe 0 / *No risk RG0 group - (EN62471)*

standard CRI 80 / CRI 80 standard

Sorgente luminosa LED con tecnologia SENSE CCT (SMD 3527 10W/m 24VDC 120leds/m
2600K>6500K) LED tecnologia RGB full color (SMD 3535 12W/m 12VDC 60leds/m)
*LED light source with SENSE CCT technology (SMD 3527 10W/m 24VDC 120leds/m and
2600K>6500K) Full color LED RGB technology (SMD 3535 12W/m 12VDC 60leds/m)*