




Musei  
uffici  
ambienti commerciali

*Museum, offices  
and commercial settings*

light is beautiful

ZEMIS

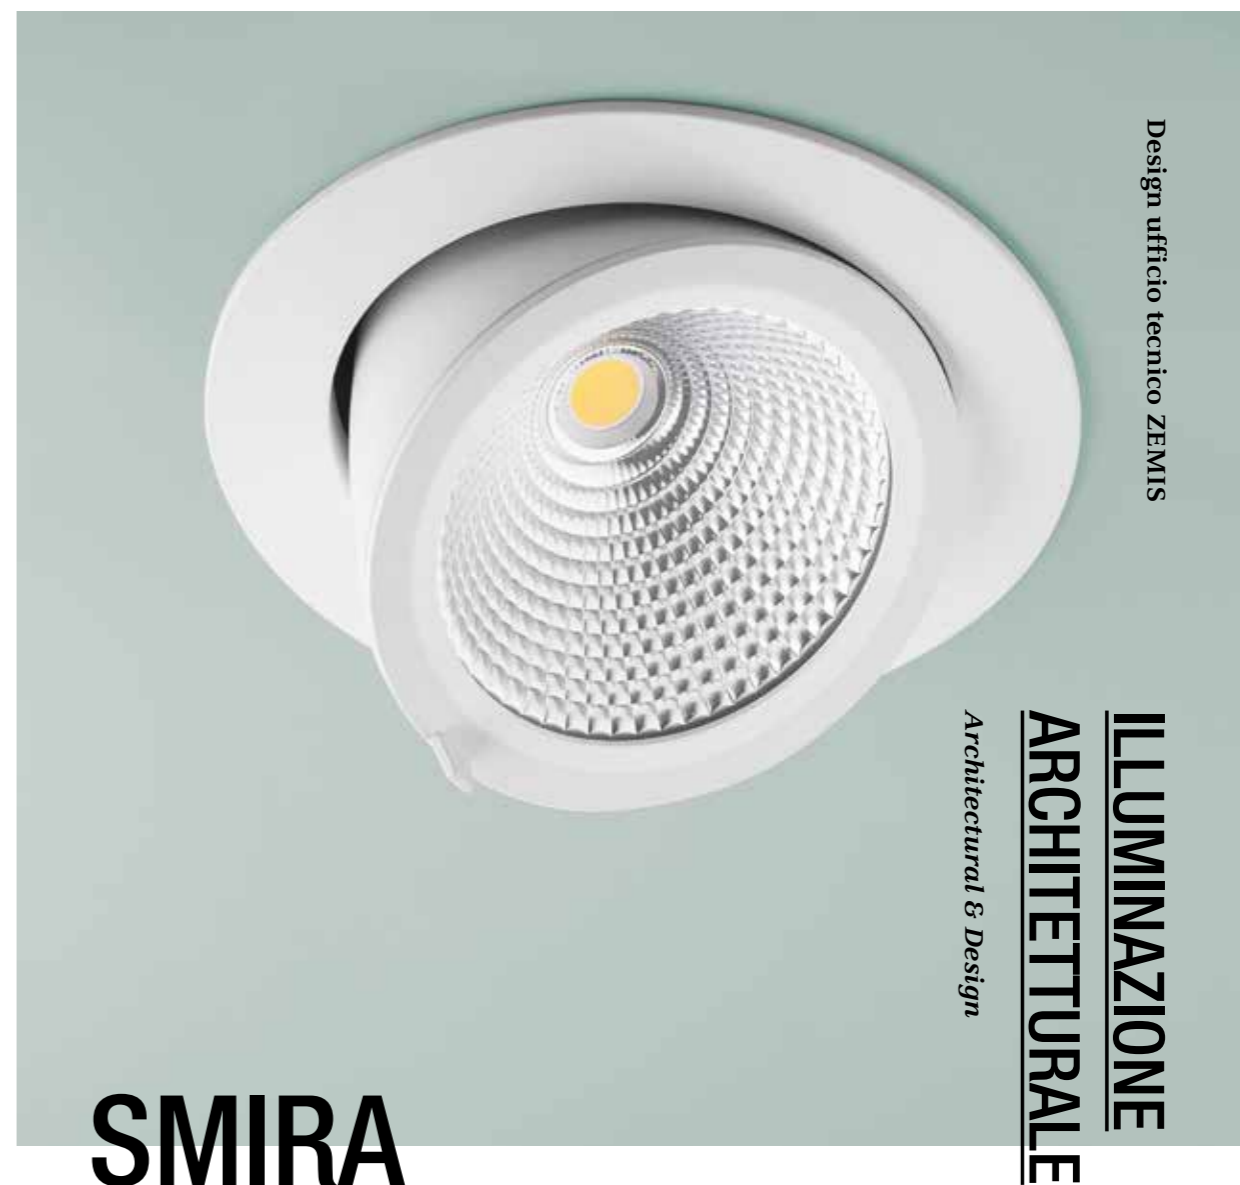

Design ufficio tecnico ZEMIS

**ILLUMINAZIONE  
ARCHITETTURALE**  
*Architectural & Design*

## SMIRA

**Incasso LED per interni orientabile, in pressofusione di alluminio verniciato bianco opaco. Indicato per l'installazione su cartongesso. La sorgente luminosa compatta LED COB è installata in un anello conico rientrante che garantisce il perfetto controllo del flusso luminoso garantendo un effetto antiabbagliamento. SMIRA è indicato per applicazioni retail e commerciali.**

*LED Indoor adjustable recessed unit, matt white diecast aluminium body. Safety transparent glass diffuser. Recommended for installation on plasterboard. The compact COB light source is installed in a receding cone - shaped ring to guarantee perfect control of the light beam ensuring an anti-glare effect. 60° wide beam angle. SMIRA provide an effective solution for any retail and commercial application.*

modelli / models

caratteristiche / specifications

accessori / accessories

### SMIRA 25

**25W 100-240VAC 50/60Hz 1 COB CITIZEN LED**  
Driver incluso - output 580mA / 27-43VDC  
*Led driver output 580mA / 27-43VDC included*  
WW- 3000K - 1805 lumen - CRI 80  
NW - 4000K - 1925 lumen - CRI 80  
ottica / beam 60°



### SMIRA 25 DT

**25W 200-240VAC 50/60Hz 1 COB CITIZEN LED**  
**Dimmerabile 0-10V**  
Driver DIMMERABILE 0-10V incluso  
output 580mA / 27-43VDC  
*0-10V DIMMABLE Led driver*  
*output 580mA / 27-43VDC included*  
WW- 3000K - 1765 lumen - CRI 80  
NW - 4000K - 1875 lumen - CRI 80  
ottica / beam 60°




### SMIRA 25 D1


**25W 200-240VAC 50/60Hz 1 COB CITIZEN LED**  
**Dimmerabile 0-10V**  
Driver DIMMERABILE 0-10V incluso  
output 580mA / 27-43VDC  
*0-10V DIMMABLE Led driver*  
*output 580mA / 27-43VDC included*  
WW- 3000K - 1765 lumen - CRI 80  
NW - 4000K - 1875 lumen - CRI 80  
ottica / beam 60°



marcature / marks



dimensioni / dimensions

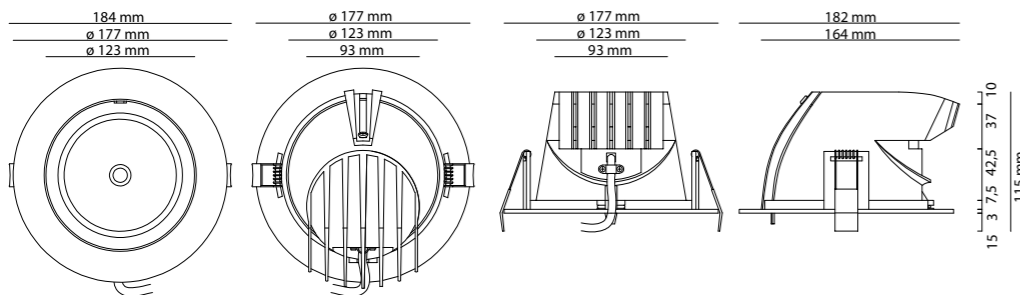

# ZEMIS



**SMIRA**  
ILLUMINAZIONE ARCHITETTURALE  
*Architectural & Design*

finitura / finishes

**Alluminio pressofuso bianco opaco RAL 9016 / Matt white RAL 9016 diecast aluminium**

diffusore / diffuser

Vetro trasparente di sicurezza e riflettore in alluminio sfaccettato ad elevata efficienza luminosa  
*Safety transparent glass and faceted aluminium reflectors with high luminous efficiency*

installazione / installation

Montaggio ad incasso su controsoffitti o pannellature (spessore massimo 15 mm)  
*Recessed mounting on plasterboard false ceilings or panellings (thickness max 15 mm)*

fissaggio / fixing system

Con molle in acciaio / *With steel fixing clamps for easy attachment*

sorgente luminosa / light sources

no. 1 COB LED CITIZEN

alimentazione / power supply

220-240VAC (alimentatore LED compreso / *LED converter included*)

cablaggio / wiring

Cablaggio L.150mm / *Wiring L.150mm lenght*

connettori / connectors

Scatola di connessione (non inclusa) / *Connection box (not supplied)*

certificazione fotobiologica  
*photobiological risk*

Nessun rischio classe 1 / *No risk RG1 group - (EN62471)*

resa cromatica / CRI

standard CRI 80

allestimenti speciali  
*special versions*

Versione DIMMERABILE TRIAC, versione DIMMERABILE 0-10V e versione DIMMERABILE DALI  
*TRIAC DIMMABLE version, 0-10V DIMMABLE version and DALI DIMMABLE version*