




**Illuminazione generale e diffusa  
in ambienti domestici e commerciali**

*Diffuse and general lighting  
in residential and commercial settings*

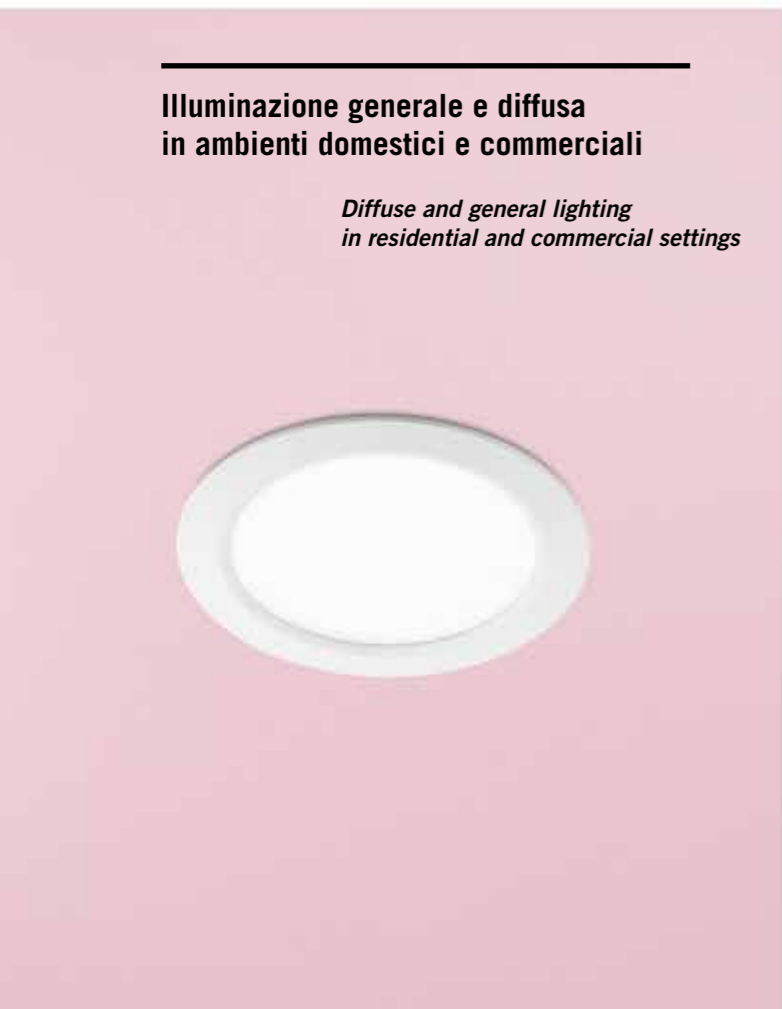

**ZEMIS**



Design ufficio tecnico ZEMIS

**ILLUMINAZIONE  
ARCHITETTURALE**  
*Architectural & Design*

## **SORELI**

Collezione di apparecchi LED ad incasso per l'illuminazione di interni, corpo realizzato in alluminio laccato bianco opaco e dissipatore in alluminio estruso.

Diffusore di protezione in policarbonato opale, antiabbagliamento ed omogeneamente illuminato. Sorgente luminosa a LED SMD ad alta efficienza. Disponibile in quattro potenze LED.

*Recessed LED fixture for indoor installation, made of die-casting aluminium rim laquered in matt white and aluminium heat dispersal unit. Opal frosted polycarbonate diffuser for uniform illumination, prevent glare. Equipped with HE SMD LED module. SORELI is available in four power sources.*

modelli / models

caratteristiche / specifications

accessori / accessories

### SORELI 5

D = ø 90,5 mm  
d = ø 64 mm  
f = 70 mm  
H = 45,5 mm  
s = 5 mm

**5W 100-240VAC 50/60Hz 10leds**

Driver incluso - output 300mA / 12-18VDC  
*Led driver output 300mA / 12-18VDC included*  
WW- 3000K - 375 lumen - CRI 80  
NW - 4000K - 420 lumen - CRI 80  
ottica / beam 110°



### SORELI 9

D = ø 105 mm  
d = ø 80,5 mm  
f = 91,5 mm  
H = 66,5 mm  
s = 5 mm

**9W 100-240VAC 50/60Hz**

Driver incluso - output 300mA / 21-32VDC  
*Led driver output 300mA / 21-32VDC included*  
WW- 3000K - 675 lumen - CRI 80  
NW - 4000K - 756 lumen - CRI 80  
ottica / beam 110°



### SORELI 15

D = ø 160 mm  
d = ø 120 mm  
f = 130 mm  
H = 66,5 mm  
s = 5 mm

**15W 100-240VAC 50/60Hz 30leds**

Driver incluso - output 300mA / 40-50VDC  
*Led driver output 300mA / 40-50VDC included*  
WW- 3000K - 1125 lumen - CRI 80  
NW - 4000K - 1260 lumen - CRI 80  
ottica / beam 110°



### SORELI 30

D = ø 230 mm  
d = ø 185 mm  
f = 195 mm  
H = 82 mm  
s = 5 mm

**30W 100-240VAC 50/60Hz 60leds**


Driver incluso - output 300mA / 75-135VDC  
*Led driver output 300mA / 75-135VDC included*  
WW- 3000K - 2250 lumen - CRI 80  
NW - 4000K - 2520 lumen - CRI 80  
ottica / beam 110°



marcature / marks



dimensioni / dimensions

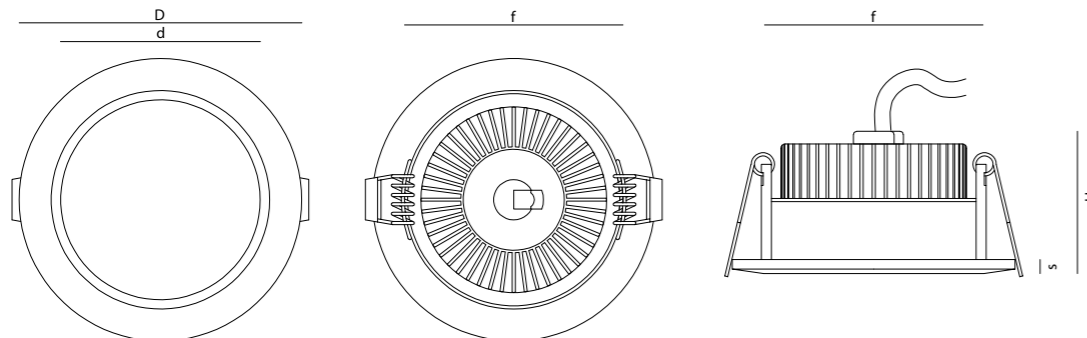

# ZEMIS

**SORELI**  
ILLUMINAZIONE ARCHITETTUALE  
Architectural & Design



finitura / finishes

**Alluminio bianco opaco RAL 9016 / Matt white aluminium RAL 9016**

diffusore / diffuser

Policarbonato opale con tecnologia no point effect / *Opal polycarbonate no point effect technology*

installazione / installation

Montaggio ad incasso su controsoffitti o pannellature (spessore massimo 25 mm)  
*Recessed mounting on plasterboard false ceilings or panellings (thickness max 25 mm)*

fissaggio / fixing system

Con molle in acciaio / *With steel fixing clamps for easy attachment*

sorgente luminosa / light sources

SMD LEDS 5630 10leds (SORELI 5) - SMD LEDS 5630 15leds (SORELI 9)  
SMD LEDS 5630 30leds (SORELI 15) - SMD LEDS 5630 60leds (SORELI 30)

alimentazione / power supply

100-240V AC (alimentatore LED compreso / *LED converter included*)

cablaggio / wiring

Cablaggio L.150mm / *Wiring L.150mm lenght*

connettori / connectors

Scatola di connessione (non inclusa) / *Connection box (not supplied)*

certificazione fotobiologica  
photobiological risk

Nessun rischio classe 0 / *No risk RGO group - (EN62471)*

resa cromatica / CRI

standard CRI 80