


## S DRIVER 12

SISTEMI DI ALIMENTAZIONE

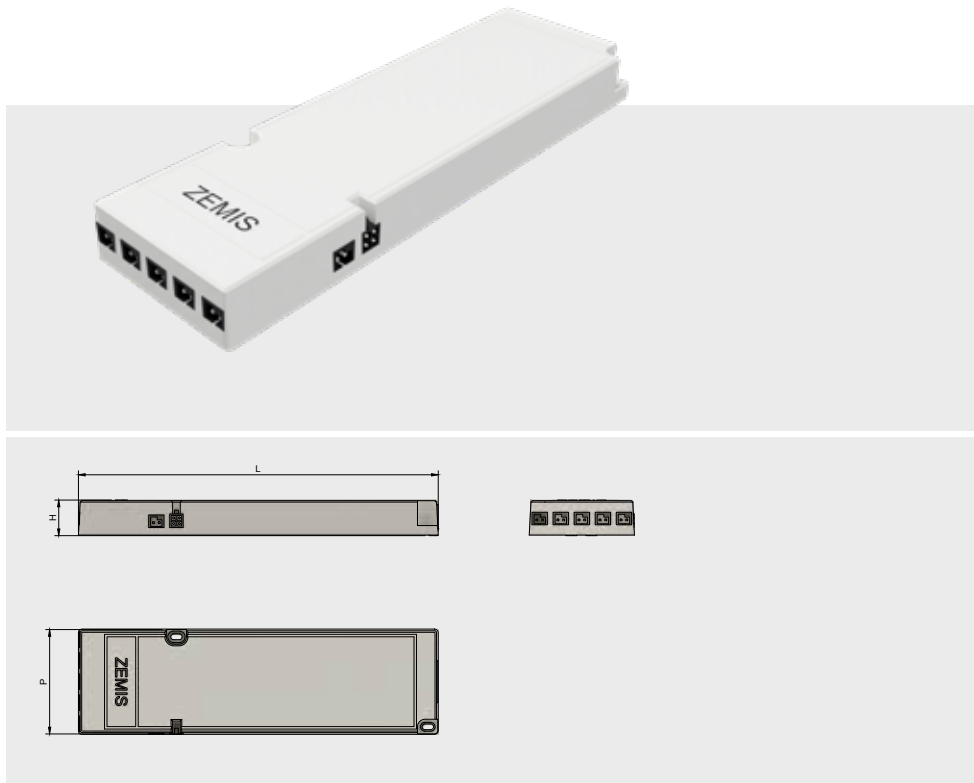

modello *model*

**Alimentatori led slim multi porta sistema S-DRIVER a tensione costante 12Vdc**  
*Constant voltage 12Vdc slim LED smart power supply S-DRIVER system*

versioni *version*

**S2412 - S3612 - S6012**

installazione *installation*

**Montaggio con viti o biadesivo** *By screws or by double sided tape*

materiale scocca *body material*

**Tecnopolimero** *Technopolymer*

grado di protezione *IP rated*

**IP20**

cablaggio ingresso *input wiring*

**Cavo di alimentazione plug & play L.2000mm con spina standard EU**  
*Plug & play power cord L.2000mm with standard EU*

cablaggio uscita *output wiring*

**4 connessioni integrate (S2412) - 6 connessioni intergrate (S3612-S6012)**  
*Built-in 4 connections (S2412) - built-in 6 connections (S3612-S6012)*

note *note*

**Porta di connessione integrata 4 poli per sistemi di controllo**  
*Integrated 4-pole connection port for control system*

marcature *marks*




DC 12V

	S-DRIVER 2412	S-DRIVER 3612	S-DRIVER 6012
Vout	12Vdc		
Output power	24W	36W	60W
Output current	2	3	5
Vin	100-240V		
Frequency	50-60Hz		
IP	IP20		
Power factor	>0.9	>0.9	>0.9
Operating temp.	-10...+45°C		
Integrated led connections	4	6	

	L	P	H
S2412	137,5	43,8	15
S3612	188	55	18
S6012	212	56	22

## S DRIVER 24

SISTEMI DI ALIMENTAZIONE

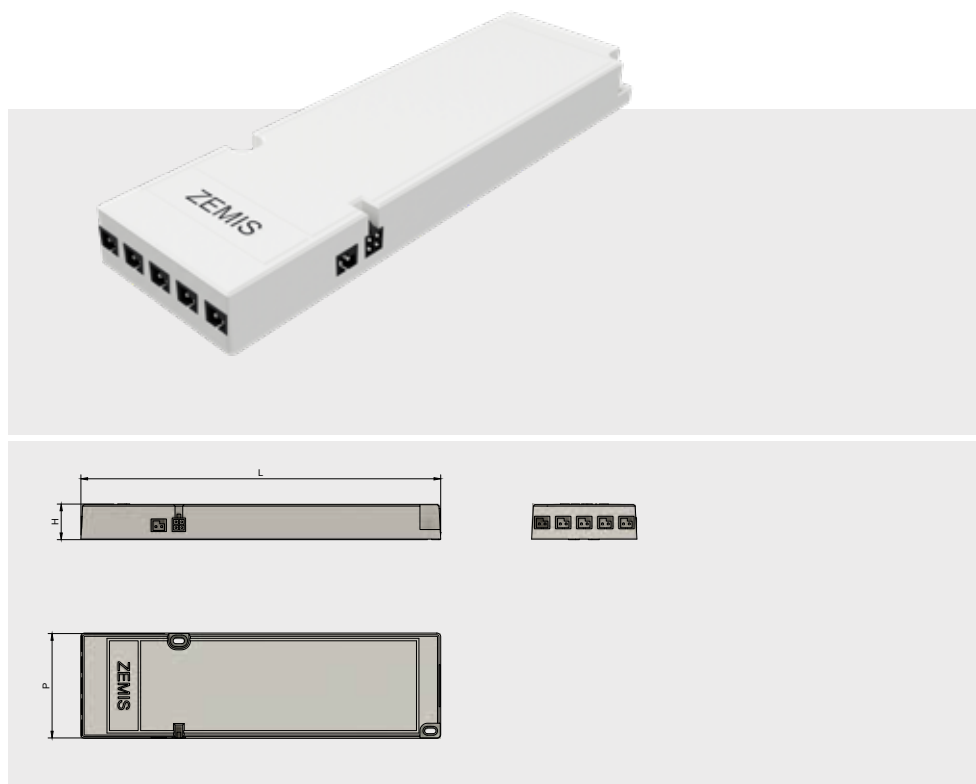

modello *model*

versioni *version*

installazione *installation*

materiale scocca *body material*

grado di protezione *IP rated*

cablaggio ingresso *input wiring*

cablaggio uscita *output wiring*

note *note*

marcature *marks*

**Alimentatori led slim multi porta sistema S-DRIVER a tensione costante 24Vdc**  
Constant voltage 24Vdc slim LED smart power supply S-DRIVER system

**S2424 - S3624 - S6024**

**Montaggio con viti o biadesivo** *By screws or by double sided tape*

**Tecnopolimero** *Technopolymer*

**IP20**

**Cavo di alimentazione plug & play L.2000mm con spina standard EU**  
*Plug & play power cord L.2000mm with standard EU*

**4 connessioni integrate (S2424) - 6 connessioni intergrate (S3624-S6024)**  
*Built-in 4 connections (S2424) - built-in 6 connections (S3624-S6024)*

**Porta di connessione integrata 4 poli per sistemi di controllo**  
*Integrated 4-pole connection port for control system*



	S-DRIVER 2424	S-DRIVER 3624	S-DRIVER 6024
Vout	24Vdc		
Output power	24W	36W	60W
Output current	1	1,5	2,5
Vin	100-240V		
Frequency	50-60Hz		
IP	IP20		
Power factor	>0.5	>0.9	>0.9
Operating temp.	-10...+45°C		
Integrated led connections	4	6	

	L	P	H
S2424	137,5	43,8	15
S3624	188	55	18
S6024	212	56	22